


44000 Series EI 30-18 (2.3 VA) Sealed Power Transformer

FEATURES

- UL and VDE Approvals
- Vacuum Filled
- Split Bobbin Design
- Self-Extinguishing Plastics UL94V-0
- Dielectric Strength 4200Vrms
- Inherently energy limited
- Resin Class B IEC 85 (20,000 h Testing to IEC 216)
- Conforms to EN 60742
- 100% Production Tested
- Weight: 110 grams



OUTLINE DIMENSIONS

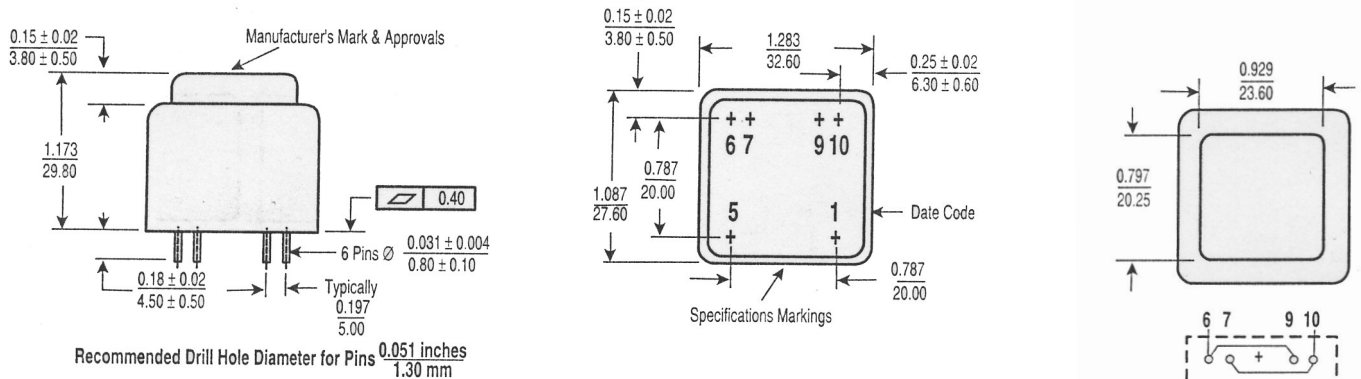

ELECTRICAL SPECIFICATIONS

ORDER NUMBER 115 VAC	ORDER NUMBER 230 VAC	SEC. VOLTAGE V	SEC. CURRENT mA	NO LOAD VOLTAGE V	AMBIENT TEMP. °C
44169	44157	6	383	10.5	70
44170	44158	9	256	15.7	70
44171	44159	12	192	21	70
44172	44160	15	153	25.9	70
44173	44161	18	128	31.4	70
44174	44162	24	96	41.9	70
44175	44163	2 x 6	2 x 192	2 x 10.5	70
44176	44164	2 x 9	2 x 128	2 x 15.7	70
44177	44165	2 x 12	2 x 96	2 x 21	70
44178	44166	2 x 15	2 x 77	2 x 25.9	70
44179	44167*	2 x 18	2 x 64	2 x 31.4	70
44180	44168*	2 x 24	2 x 48	2 x 41.9	70

NOTE: Circuit isolation protection is provided per EN 60742
* Limited Approval Ratings



ZETTLER Magnetics, Inc. The Power to Transform

75 COLUMBIA o ALISO VIEJO, CA 92656 o PHONE 949-360-5838 o FAX 949-360-5839
o WEB SITE: <http://www.zettlermagnetics.com> o E-MAIL: sales@zettlermagnetics.com