


Size EF20 • 2 or 3 Outputs: 5/5v or 12/12v or 3.3+5/12V

- Primary / Secondary Insulation $\geq 4000V$
- Primary / Auxiliary Insulation $\geq 1500 V$
- Creepage distance Primary / Secondary $\geq 8 \text{ mm} / \geq 6 \text{ mm}$
- Construction conforms to IEC950, IEC335, IEC61558 for reinforced insulation
- Exclusively uses UL94-V0 listed materials

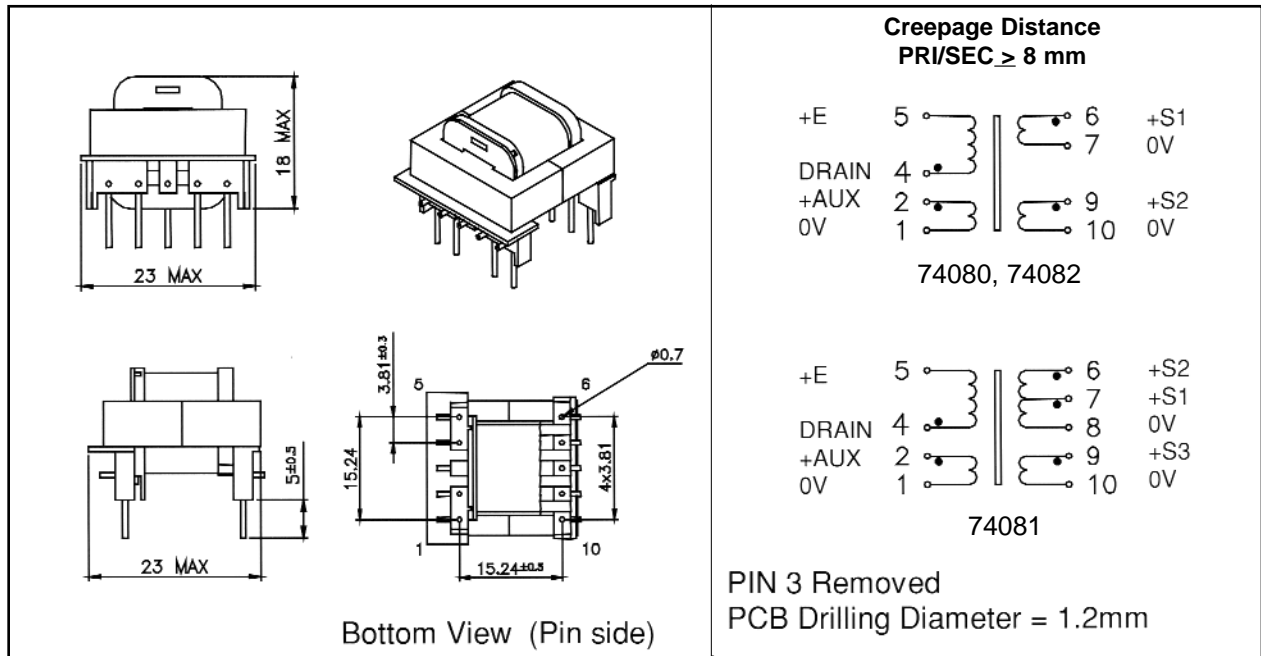

Part No.	Output Power Maximum	Windings					
			Pins	Turns	Voltage	Current Maximum	Inductance (+/-10%)
74080	24w Ambient Temp. <50°C	Pri	4 - 5	86	80 - 135 (VOR)	1.0 Apeak	1000µH
		Aux	2 - 1	12	11 - 18 Vdc	0.3 Adc	
		S1	6 - 7	10	9 - 15 Vdc	1.5 Adc	
		S2	9 - 10	10	9 - 15 Vdc	1.5 Adc	
74081	20w Ambient Temp. <50°C	Pri	4 - 5	80	75 (VOR)	0.9 Apeak	1100µH
		Aux	2 - 1	17	15 Vdc	0.3 Adc	
		S1	7 - 8	4	3.3 Vdc	3 Adc	
		S2	6 - 8	6	5 Vdc	Sum S1+S2	
		S3	9 - 10	14	12 Vdc	1.3 Adc	
74082	20W Ambient Temp. <50°C	Pri	4 - 5	86	60 - 135 (VOR)	0.85 Apeak	1300µH
		Aux	2 - 1	12	7 - 18 Vdc	0.3 Adc	
		S1	6 - 7	5	3 - 7.5 Vdc	2.0 Adc	
		S2	9 - 10	5	3 - 7.5 Vdc	2.0 Adc	