
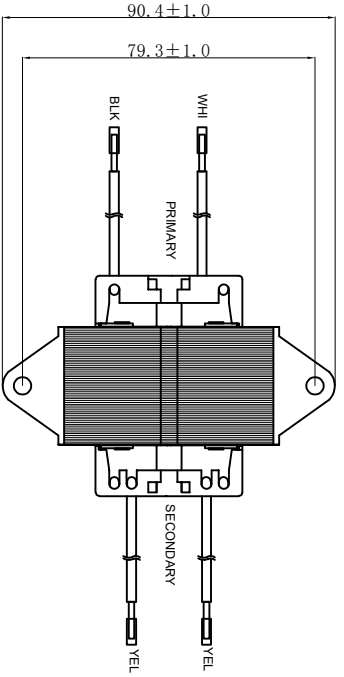
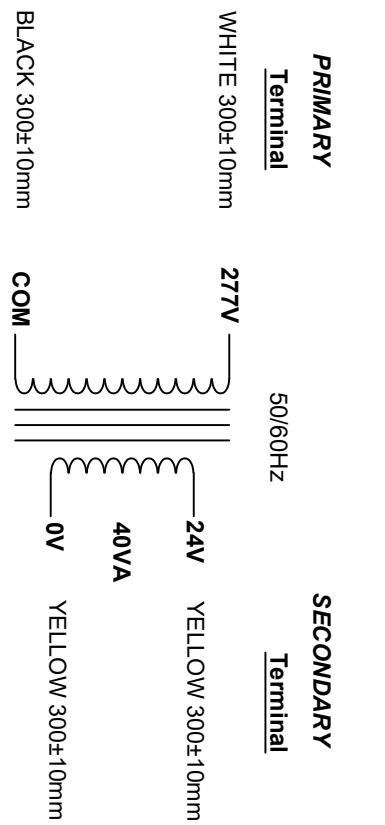


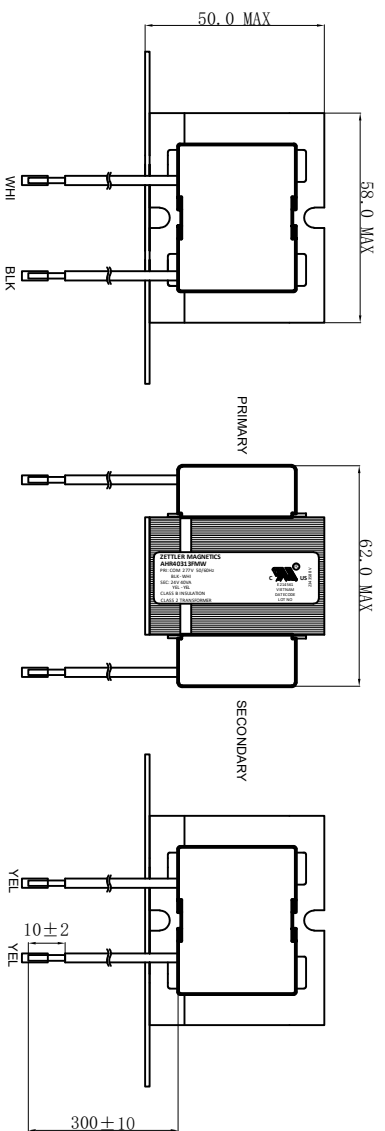

At least 6-point bold

At least 5-point bold

Adjust size for suitable, do not cover any content

At least 5-point bold

At least 5-point bold

LABEL FORMAT

All of content use font: Calibri

INPUT	277V
OUTPUT	24V
MAX. VA RATING [CE]	40VA
FREQUENCY RANGE	50/60Hz
LOAD CURRENT	1.67A
TCO/CB	N/A
WINDING INSUL. CLASS	130°C Class B
U.L. FILE	E214561
LEAD INFO (IF USED)	
CONDUCTOR SIZE	UL1015 18AWG
RATED TEMPERATURE	105°C

Unit: mm	Tolerance
	$\geq 10 \pm 1.0$
	$< 10 \pm 0.2$

ZETTLER MAGNETICS

A ZETTLER GROUP COMPANY

Version	Date	Description	By	Drawn:	Reviewed:	Approved:	SKU:	AHR40313FMW
	2026/02/27	Initial release	Tuan Vo	Tuan Vo	Phuong Ly	Khoa Huynh	Customer PN:	
							Dwg No:	ZVN-F26-0010
								Scale: 1:1
								Page: 1/1