

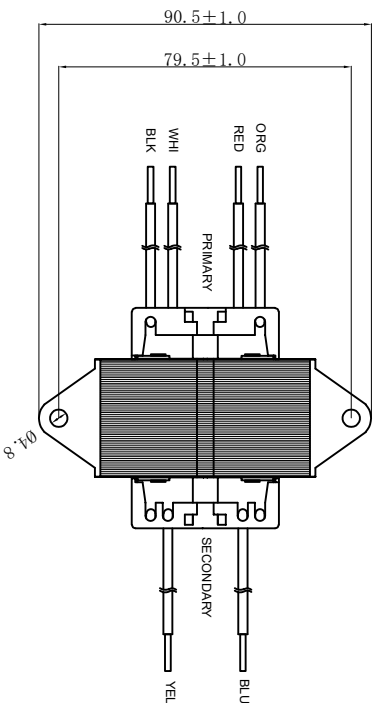


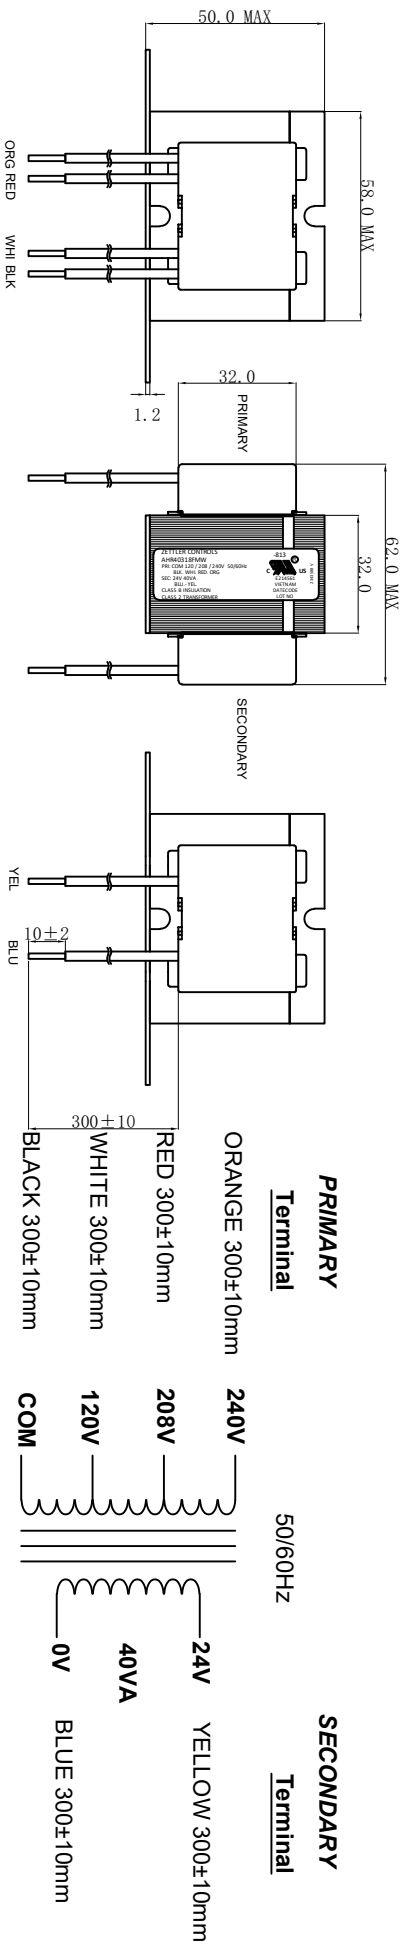

INPUT	120/208/240V
OUTPUT	24V
MAX. VA RATING [CE]	40VA
FREQUENCY RANGE	50/60Hz
LOAD CURRENT	1.67A
TCO/CB	N/A
WINDING INSUL. CLASS	130°C Class B
U.L. FILE	E214561
LEAD INFO (IF USED)	
CONDUCTOR SIZE	UL1015 18AWG
RATED TEMPERATURE	105°C

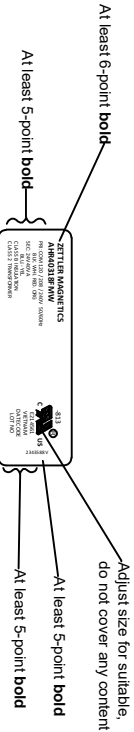

LABEL FORMAT
All of content use font: Calibri

Version	Date	Description	By	Drawn:	Reviewed:	Approved:	SKU:	AHR40318FMW
1	2026/02/27	Initial release	Tuan Vo	Tuan Vo	Phuong Ly	Khoa Huynh	Customer PN:	
2							Dwg No:	ZVN-F26-0011
3								Scale: 1:1
4								Page: 1/1
5								
6								
7								
8								

ZETTLER MAGNETICS
A ZETTLER GROUP COMPANY