
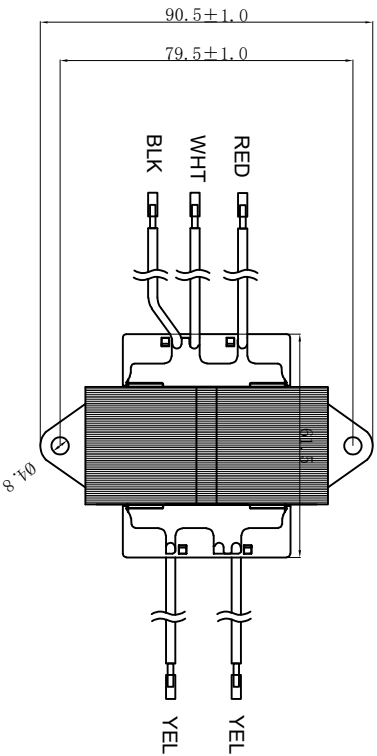
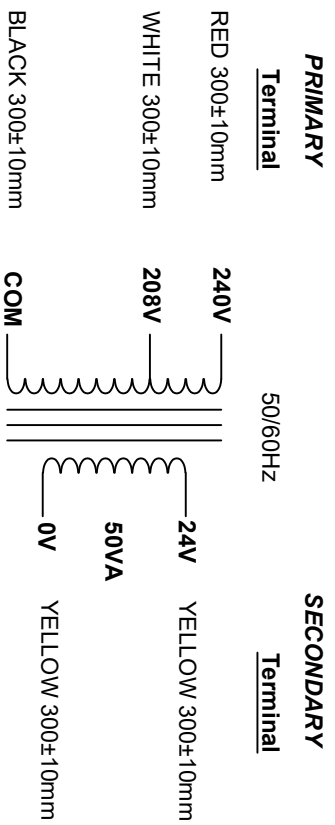
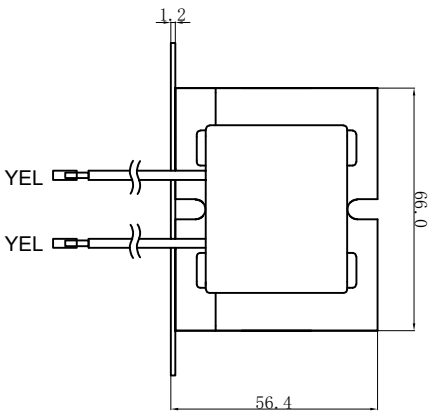
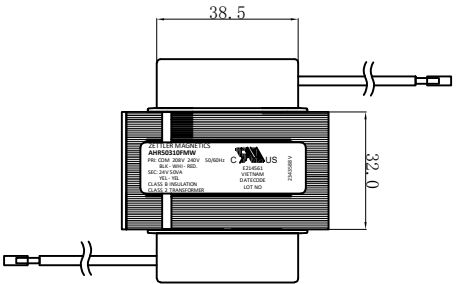
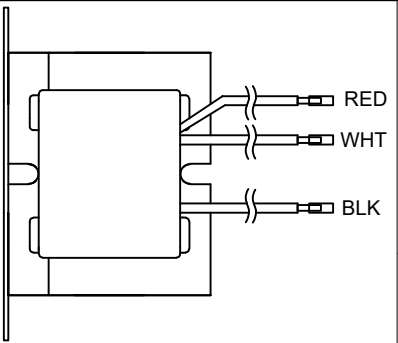


At least 6-point bold
At least 5-point bold
Adjust size for suitable,
do not cover any content



LABEL FORMAT

All of content use font: Calibri

Version	Date	Description	By
1	2026/03/02	Initial release	Tuan Vo

Unit:	mm	Tolerance
	$\geq 10 \pm 1.0$	$< 10 \pm 0.2$

INPUT	208/240V
OUTPUT	24V
MAX. VA RATING [CE]	50VA
FREQUENCY RANGE	50/60Hz
LOAD CURRENT	2.08A
TCO/CB	N/A
WINDING INSUL. CLASS	130°C Class B
U.L. FILE	E214561
LEAD INFO (IF USED)	
CONDUCTOR SIZE	UL1015 18AWG
RATED TEMPERATURE	105°C

ZETTLER MAGNETICS
A ZETTLER GROUP COMPANY

Drawn:	Reviewed:	Approved:	SKU:	AHR50310FMW	
Tuan Vo	Phuong Ly	Khoa Huynh	Customer PN:		
			Dwg No:	ZVN-F26-0028	Scale: 1:1
					Page: 1/1