

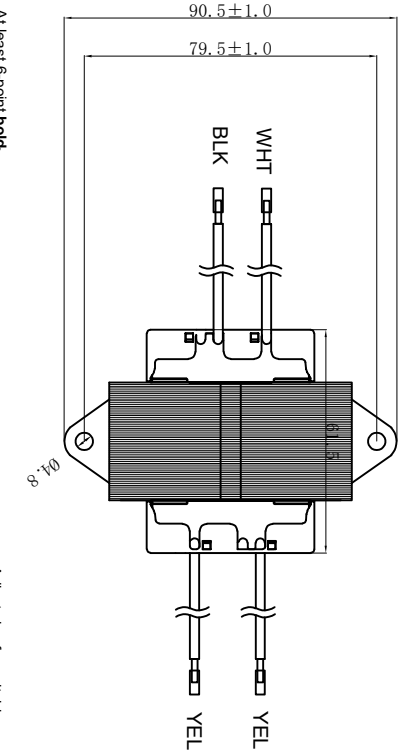
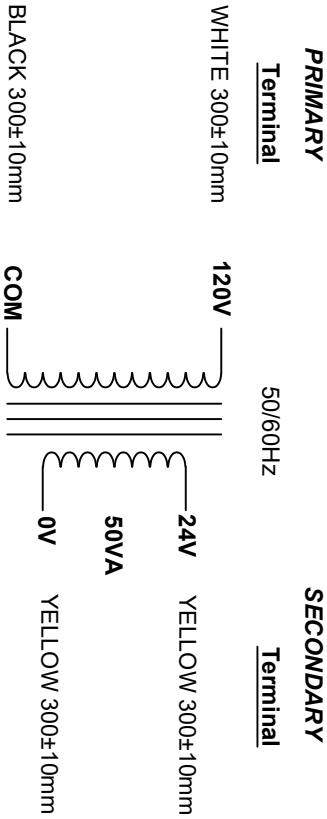


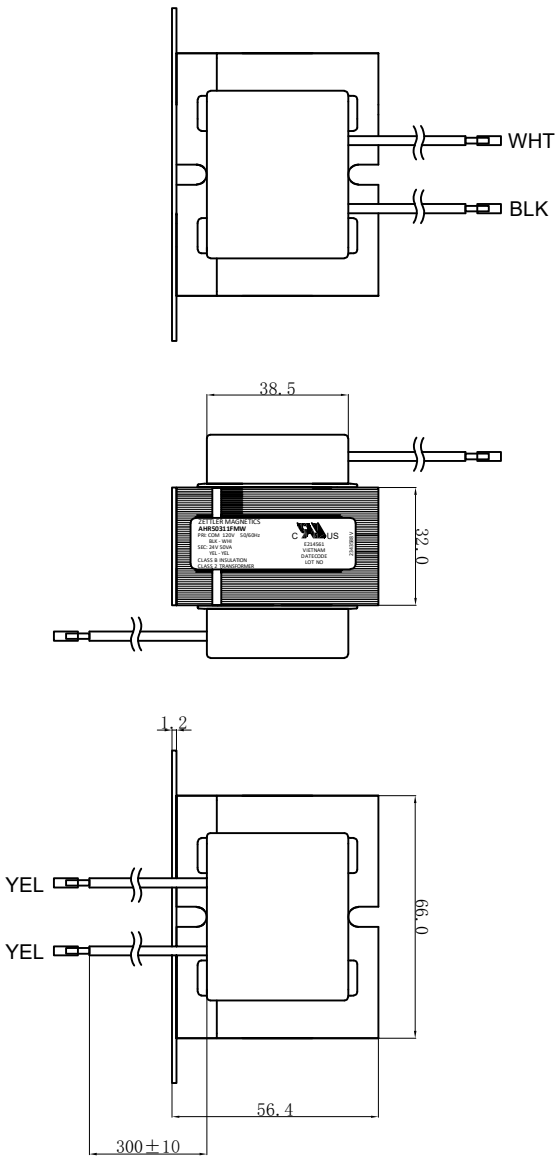

INPUT	120V
OUTPUT	24V
MAX. VA RATING [CE]	50VA
FREQUENCY RANGE	50/60Hz
LOAD CURRENT	2.08A
TCO/CB	N/A
WINDING INSUL. CLASS	130°C Class B
U.L. FILE	E214561
LEAD INFO (IF USED)	
CONDUCTOR SIZE	UL1015 18AWG
RATED TEMPERATURE	105°C

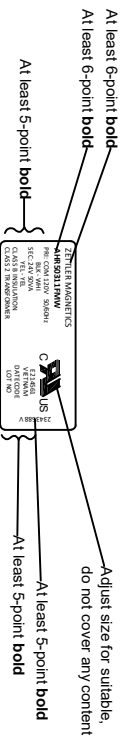

Label Format

All of content use font: Calibri

Version	Date	Description	By
1	2026/03/02	Initial release	Tuan Vo

Unit: mm	Tolerance
	≥10 ±1.0
	<10 ±0.2

Drawn:	Reviewed:	Approved:	SKU:	AHR50311FMW
Tuan Vo	Phuong Ly	Khoa Huynh	Customer PN:	
			Dwg No:	ZVN-F26-0029
				Scale: 1:1
				Page: 1/1

ZETTLER MAGNETICS

A ZETTLER GROUP COMPANY