

External components:  
 • Input capacitor: High frequency low resistance capacitance is recommended; withstand capacitor, to remove high frequency noise.  
 • Set the rear circuit.  
 • Safety requirement: Type: 2A/250V Slow-Blow

### ORDERING CODE

Example:

ZP=Zettler standard series

AP=Customized series

HP=High Performance series

DP=DC-DC

Total Output Power (W)

Example:

03=3W

20=20W

Output Type

S=Single Output

D=Dual Output

T=Triple Output

First Output Voltage

05=5V, 12=12V

Second Output Voltage

06=6V, 12=12V


00= No Second Output

Input AC Voltage Range

W=Wide Voltage Input

H=High Voltage Input ( $\geq 165\text{VAC}$ )

L=Low Voltage Input ( $< 165\text{VAC}$ )

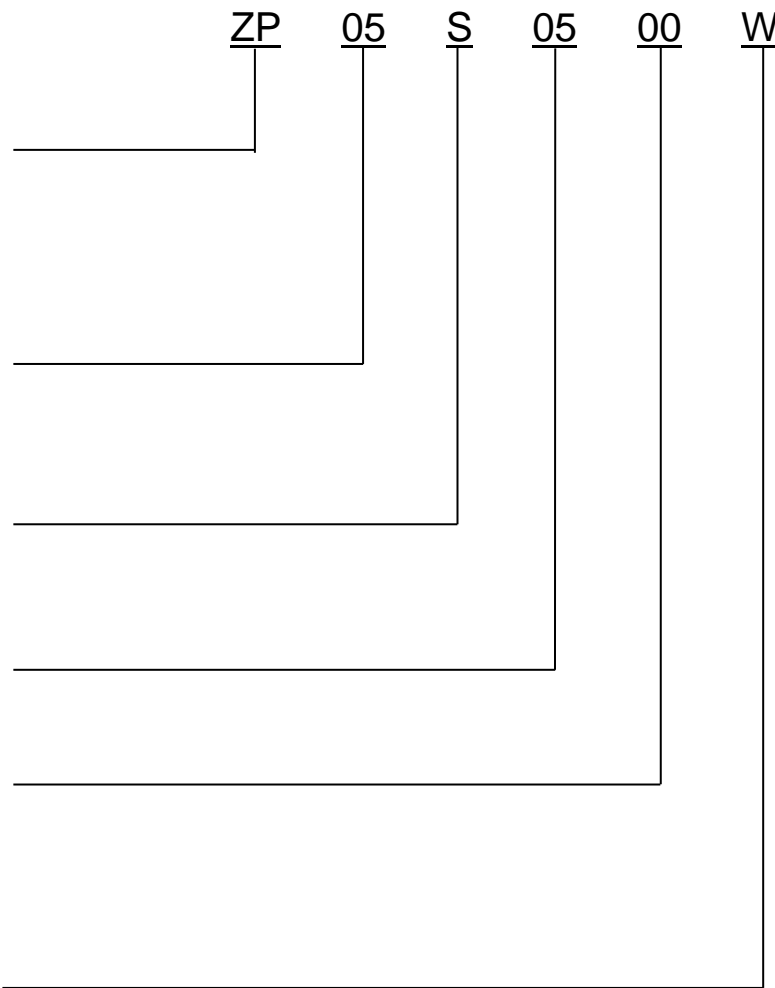

### FEATURES

- PCB mounted switching Power module
- AC input voltage range: 85VAC~265VAC
- DC input voltage range: 100VDC~370VAC
- Ambient temperature range:-25°C~85°C
- Storage temperature range:-40°C~105°C
- Leakage current (input :265VAC):<0.1mA
- Isolation voltage: input –Output≥3000Vac 60S
- Insulation Resistance: Input –Output 500VDC≥100M Ohms
- MTBF(at 25°C 70%RH environment):>300000hrs
- Compact size, easy installation
- High efficiency Low standby Power consumption, environment-friendly
- Built-in output overcurrent protection, over-voltage protection, short circuit protection
- Built-in EMI filter components, comply with the EN55022 class B standard
- Insulation: class II

### APPLICATIONS

This series could be widely applied in the LED, light control, Instrument, smart home and other home appliances.



### MODEL LIST

Part No.,	Output Power	DC Voltage	Rated Current	Efficiency 230VAC, % Typ.	Ripple& Noise(max)	Ambient TEMP(°C)	Weight	Certificate		
								TUV	CB	UL
ZP05S0500W	5W	5Vdc	1000mA	70%	<1% Vout	70	50g	•	•	•
ZP05S0600W	5W	6Vdc	830mA	70%	<1% Vout	70	50g	•	•	•
ZP05S0700W	5W	7.5Vdc	667mA	70%	<1% Vout	70	50g	•	•	•
ZP05S0900W	5W	9Vdc	555mA	70%	<1% Vout	70	50g	•	•	
ZP05S1000W	5W	10Vdc	500mA	70%	<1% Vout	70	50g	•	•	
ZP05S1200W	5W	12Vdc	417mA	70%	<1% Vout	70	50g	•	•	
ZP05S1500W	5W	15Vdc	300mA	70%	<1% Vout	70	50g	•	•	
ZP05S1800W	5W	18Vdc	277mA	70%	<1% Vout	70	50g	•	•	
ZP05S2400W	5W	24Vdc	208mA	70%	<1% Vout	70	50g	•	•	

### ELECTRICAL SPECIFICATION


Item		Specification		
Input	Input Voltage Range	85~265Vac or 100~370Vdc		
	AC Input Frequency Range	47~63Hz		
	Input Current	115Vac	230Vac	
		100mA	65mA	
	Inrush Current	115Vac	230Vac	
		10A	20A	
	Stand-by Power Consumption	0.3W Max		
	Recommended External Input Fuse	2A/250V (Time lag)		
Hot Plug	(Unavailable)			
Output	Output Voltage Accuracy	±5% (Typ)		
	Line Regulation	±0.5%		
	Load Regulation	±0.5%		
	Temperature Drift Factor	±0.05%/°C ( 0-85°C )		
	Min. Load	0		
	Set-Up time At Full Load	149ms/230Vac,248ms/115Vac		
	Hold-up Time At Full Load	62.4ms/230Vac ,10.6ms/115Vac		
Protection Characteristics	Over-Circuit Protection	≥120%Io Self-recovery		
	Short Circuit Protection	Hiccup ,continuous ,short capable, self-recovery		
Ambient	Ambient Temperature	- 25°C ~ 85°C (Refer to derating curve)		
	Ambient Humidity	10~90% RH ( No Condensing) at full load		
	Storage Temperature	- 40°C ~ 105°C		
	Storage Humidity	5%~95%		
Safety &EMC requirement	Dielectric Strength	Input-Output ≥3000Vac 5mA 60S		
	Reference Safety Standards	UL/CUL60920 IEC/EN60950 IEC/EN60335 IEC/EN61558-2-16		
	EMI filter Need an external capacitance	CE	Meet CISPR22/EN55022, CLASS B	
		RE	Meet CISPR22/EN55022, CLASS B	
Reliability Requirement	MTBF(MIL-HDBK-217F)	300Khrs Min @230VAC input 25°C		
	Burn-In Test	The unit shall be burned in for 2~5 hours under 264Vac input and DC with full load at normal temperature		

### PRODUCT CHARACTERISTIC CURVE

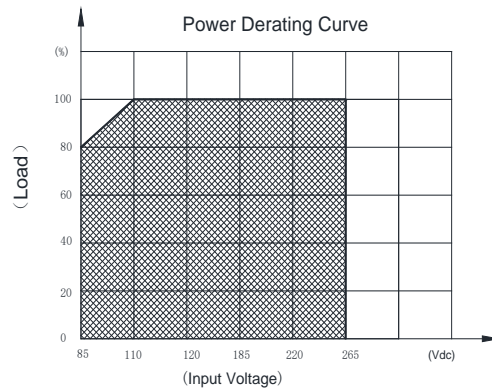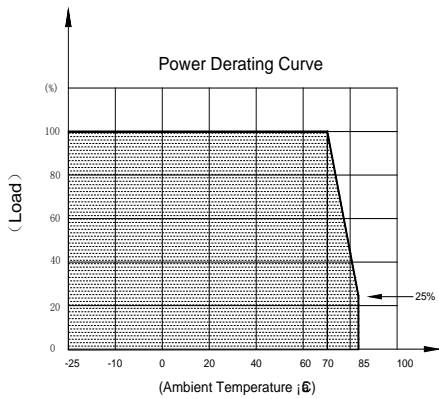

ZP05S0500W ZP05S0600W ZP05S0700W UL Certification Temperature Up to 55°C

### TYPICAL APPLICATION SCHEMATIC

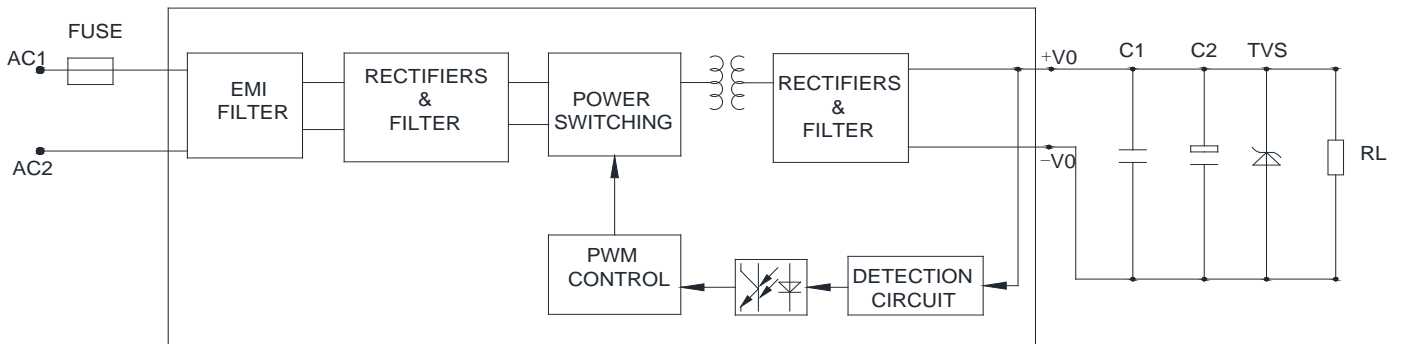

Note; The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meet EMC directives.

Optional recommendations on external components:

C1 from output filter is electrolytic capacitor, High frequency low resistance capacitance is recommended; withstand voltage derating over 80%.

C2 from output filter is ceramic capacitor, to remove high frequency noise.

TVS from output filter is to protect the rear circuit.

Fuse from input filter is to meet safety requirement. Type: 2A/250V Slow-Blow

### MECHANICAL SPECIFICATION

