





RoHS

ORDERING CODE

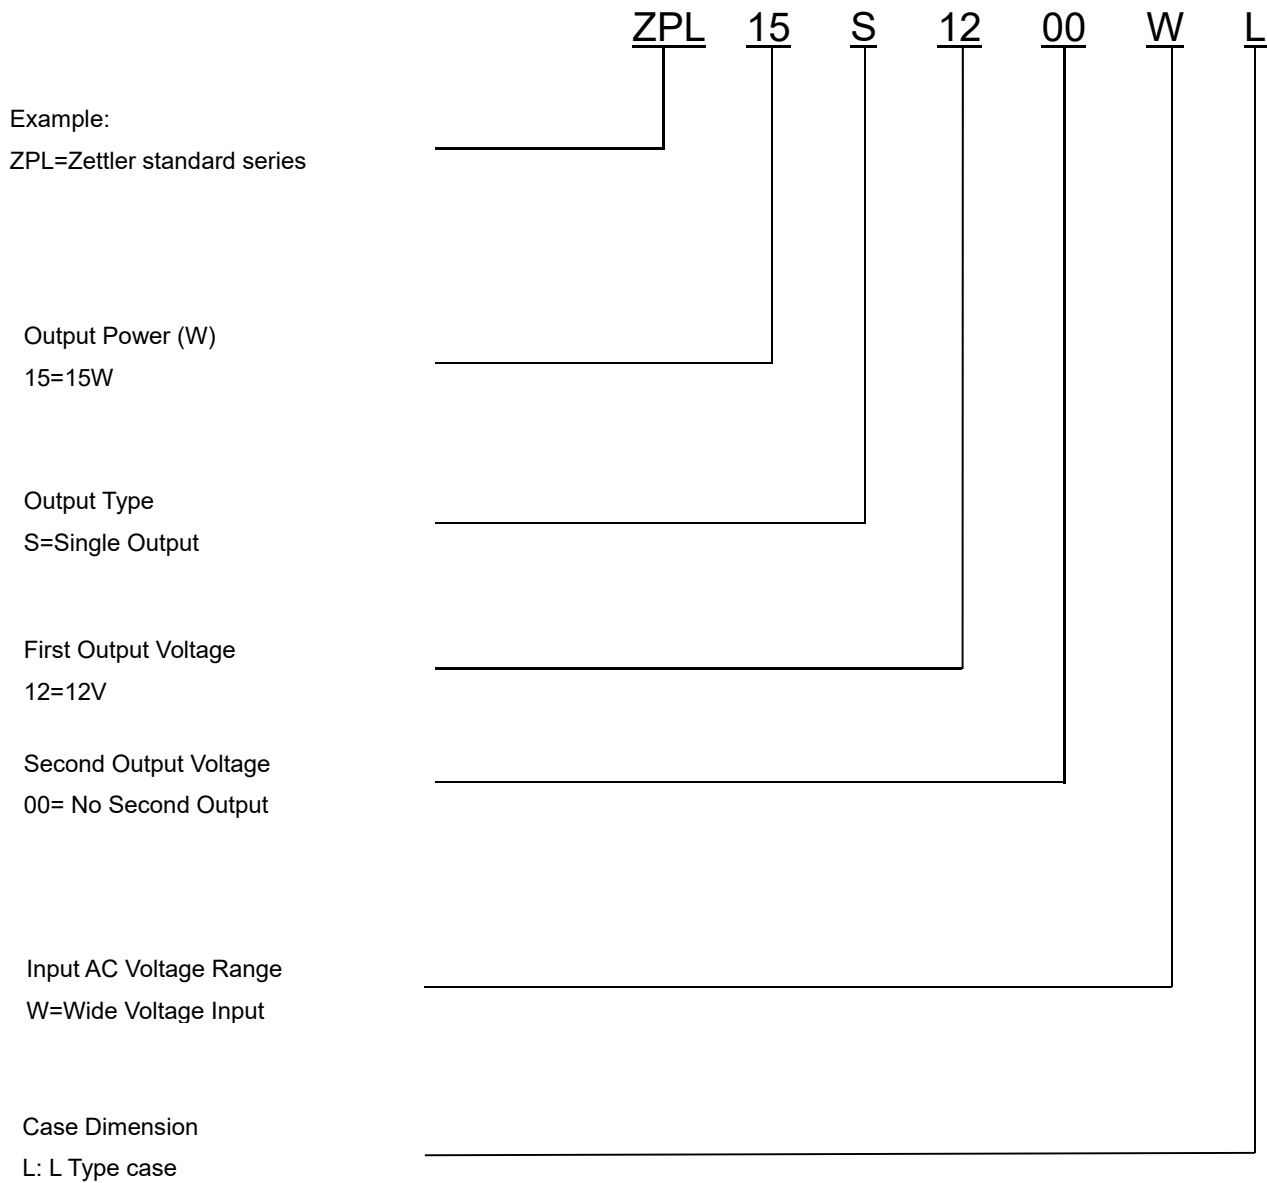

FEATURES

- PCB mounted switching Power module
- AC input voltage range: 90VAC-264VAC
- DC input voltage range: 100VDC-370VDC
- Ambient temperature range: -25°C~50°C
- Storage temperature range: -25°C~85°C
- Leakage current (input :264VAC): <0.3mA
- Isolation voltage: input –Output \geq 3600VAC 60S
- Insulation Resistance: Input –Output 500VDC \geq 100M Ohms
- MTBF: 300Khrs Min MIL-HDBK-217F (25°C)
- Compact size, easy installation
- High efficiency low standby Power consumption, green environmental protection function
- Built-in output over current protection, over-voltage protection, short circuit protection
- Built-in EMI filter components, comply with the EN55032 class B standard
- Class II Construction 

APPLICATIONS

This series could be widely applied in the LED, light control, Instrument, smart home and other home appliances.



MODEL LIST

Model No.	Output Power	DC Voltage	Rated Current	Efficiency 230VAC, % Typ.	Ripple&Noise (max)	Ambient TEMP(°C)	Weight	Certificate		
								UL	TUV	CB
ZPL15S0500WL	15W	5Vdc	3000mA	78%	<200mV	50	65g	●	●	●
ZPL15S1200WL	15W	12Vdc	1250mA	82%	<200mV	50	65g	●	●	●
ZPL15S1500WL	15W	15Vdc	1000mA	82%	<200mV	50	65g	●	●	●
ZPL15S1800WL	15W	18Vdc	830mA	83%	<200mV	50	65g	●	●	●
ZPL15S2400WL	15W	24Vdc	620mA	83%	<200mV	50	65g	●	●	●


ELECTRICAL SPECIFICATION

Model No.		ZPL15SXX00WL		
Input	Rated Voltage	100-240VAC		
	Voltage Range	90-264VAC or 100-370VDC		
	Frequency (Hz)	47-63 Hz		
	Current (Full load)	115VAC	230VAC	
		300mA	200mA	
	Inrush Current (<500us)	20A	40A	
	No Load Loss	0.3W Max @230VAC		
HOT PLUG	Unavailable			
Output	Voltage (V)	Refer to "Model List"		
	Current (mA) max.	Refer to "Model List"		
	Voltage Accuracy	±3%		
	Line Regulation	±0.5%		
	Load Regulation	±1%		
	Minimum Load (mA)	0		
	Ripple & Noise	Refer to "Model List"		
	Efficiency (typ.)	Refer to "Model List"		
	Start-up Time	3s		
	Hold up Time	76.9ms/230VAC ,13.6ms/115VAC		
Protection	Over Current Protection	Hiccup mode		
	Short Circuit Protection	Hiccup mode		
Environment	Operating Temperature	-25°C...+70°C @Free air convection (Refer to the derating curve)		
	Operating Humidity	20~90% RH (No Condensing) at full load		
	Storage Temperature	-25°C~85°C		
	Storage Humidity	10~95% RH		
	Temperature Coefficient	±0.05%/°C (0~50°C)		
Physical	Case Material	Plastic (UL 94V-0 rated)		
	Weight	65g (ref.)		
Safety & EMC	Dielectric Strength	I/P-O/P : 3600VAC		
	Protection against electric shock	Class II construction <input type="checkbox"/>		
	Safety Standards	Compliance With EN62368-1, EN61558-2-16, Plastic materials in accordance with EN60335-1 clause 30		
	EMI	Compliance With EN55032 CLASS B, EN61000-3-2, EN61000-3-3		
	EMS (Noise Immunity)	Compliance With EN55035	Need to add external EMC component (Refer to the Schematic)	
Reliability Requirement	MTBF	300Khrs Min MIL-HDBK-217F (25°C)		
	Burn-In Test	The unit shall be burned in for 2~4 Hours under 240Vac input and with full load at 25°C		

PRODUCT CHARACTERISTIC CURVE

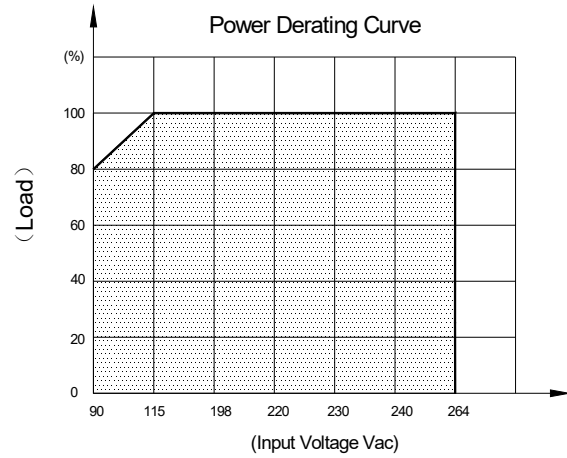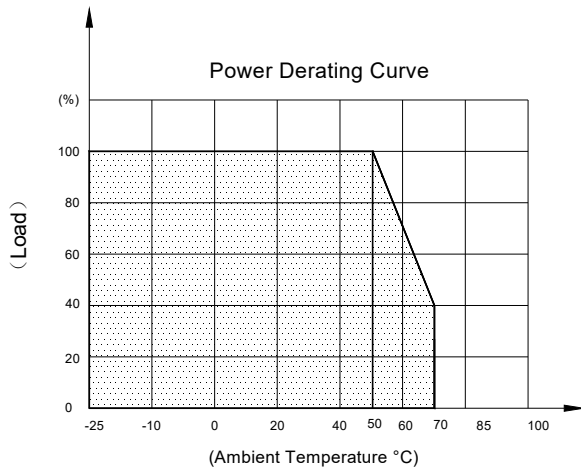

TYPICAL APPLICATION SCHEMATIC

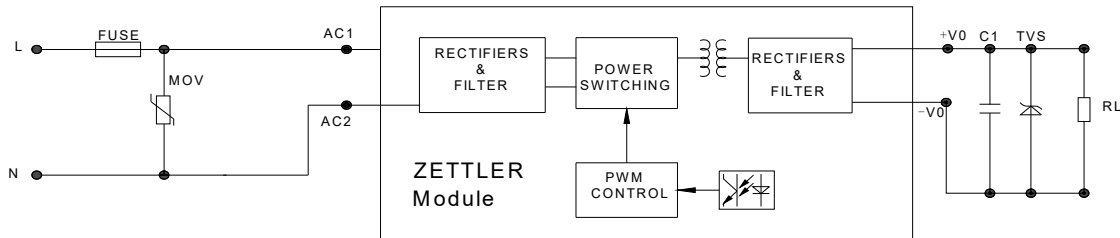

ITEM	MOV	FUSE
1~2W	14D561K	1A/250V
3-10W	14D561K	2A/250V
10~20W	14D561K	3.15A/250V

Note: External circuit components are only recommendations, customers should choose their own components and values according to their specific system application requirements.

MECHANICAL SPECIFICATION

Outline Dimensions

Dimensions (mm): 52.4±0.5 [2.063], 27.2±0.5 [1.071], 24.0±0.5 [0.945], 3.5±0.5, 3.7 [0.146], 3.2 [0.126], 20.8±0.5 [0.819], 45.0±0.5 [1.772], 8.0±0.5 [0.315].

Pin size $\phi 1.0$ (ref.)

Tolerances: ±0.5mm

PCB Layout

PCB hole $\Phi 1.6$ [0.063]

Dimensions (mm): 20.8 [0.819], 28.0 [1.102], 8.0 [0.315], 3.4 [0.134], 4.1 [0.161], 45.0 [1.772], 53.2 [2.094].

NO.	Pin connect	Function
1	AC/L	AC Input
2	AC/N	AC Input
3	-	Output Negative
4	+	Output Positive